



### DESCRIPTION

The Chromacity 1040 is an air-cooled, compact, ultrafast ytterbium fibre-based laser providing exceptional performance with turnkey operation. With high average power, outstanding pulse quality and power stability, the 1040 is an ideal laser source for imaging, spectroscopy, and quantum applications.

The 1040 laser is ultra-stable across temperature and time, offering repeatable pulse power, pulse-to-pulse and over extended periods of operation. The laser is designed to be installed remotely and does not require specialist expertise to operate.

The Chromacity 1040 laser comes with a laser head and a separate external power supply unit (PSU) providing flexible placement options.

The Chromacity 1040 is controlled using an intuitive web browser user interface, or via an RS-232 serial port, providing easy integration into OEM equipment, or remote operation on the bench in a typical laboratory environment.

### FEATURES

- 1040nm centre wavelength
- Pulse duration <100fs max.
- Average output power >4W typ. for HP version
- Repetition rate 100MHz (80MHz option)
- Peak power 353kW typ. (100MHz, 100fs, 4W)
- Pulse energy 40nJ (100MHz, 100fs, 4W)
- Beam diameter 1.2mm


### APPLICATIONS

- Multi-photon imaging
- SHG microscopy
- Light sheet microscopy
- THz generation
- Non-linear optics
- Super-continuum generation



### SPECIFICATIONS

Parameter	Specification
Central Wavelength	1040nm, FWHM ~35nm
Pulse Width	<100fs max (@100MHz rep rate)
Repetition Rate	100MHz (80MHz, 200MHz factory set options)
Average Power (Factory Option)	High Power: Typ. >4W, 3.5W min. Low Power: Typ. 500mW
Spatial Beam Profile	Single mode
Pulse Energy	>40nJ (100MHz, 100fs, 4W)
Output Polarisation	Linear
Beam Quality (M <sup>2</sup> )	<1.1, <1.2 max.
Beam Divergence	<0.8mrad typ.
Beam Diameter	1.2mm, ±0.2mm (at exit of laser)
Beam Ellipticity	>0.9 typ.
Beam Pointing Stability	<20µrad/°C
Relative Intensity Noise (r.m.s. 6Hz – 3MHz)	<0.15% typ.
Long Term Power Stability	<0.5% (100h)
Laser Settings and Functions	Web browser via Wi-Fi, Ethernet or RS-232
Laser Diagnostics	Available from PC
Operating Temperature for Specified Performance	21°C, ±3°C
System Options	Group Delay Dispersion (GDD) Pre-Compensation

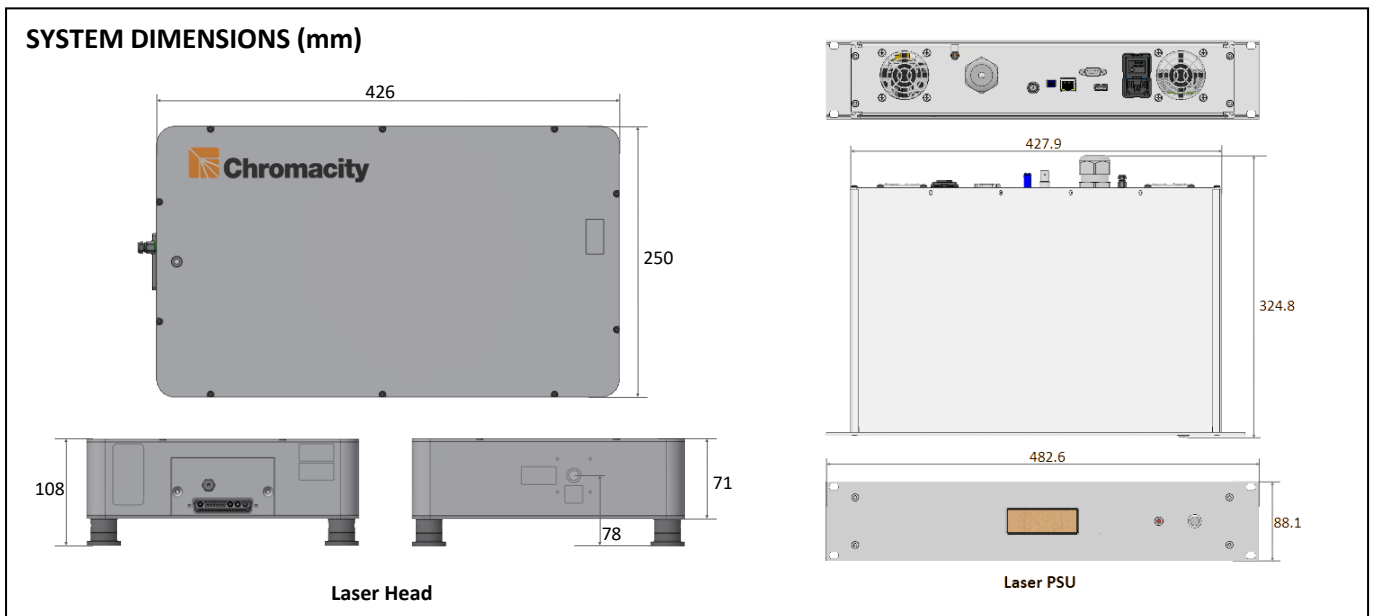

### CONTACT

Web: [www.chromacitylasers.com](http://www.chromacitylasers.com)  
 Email: [sales@chromacitylasers.com](mailto:sales@chromacitylasers.com)  
 Tel: +44 (0) 131 449 4308

### CHROMACITY LIMITED

43C Research Avenue North  
 Riccarton  
 Edinburgh  
 United Kingdom  
 EH14 4AP