

Compact FSI sCMOS Camera


Dhyana 201D



Product Advantages

- 1" area
- 72% peak QE
- 6.5 μ m x 6.5 μ m pixel size
- 45ke- full well capacity
- 70fps@full resolution
- USB3.0 interface

Product structure (unit: mm)

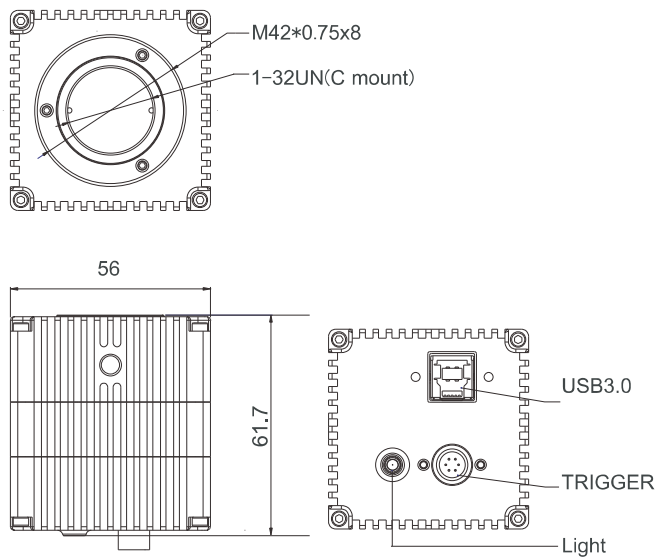

Specifications

Model	Dhyana 201D
Sensor model	FSI sCMOS
Shutter type	Rolling
Color/Mono	Mono
Effective area	13.3mm x 7.462mm
Resolution	2048(H) x 1152(V)
Pixel size	6.5 μ m x 6.5 μ m
QE	72%@595nm
Full-Well capacity	45ke-
Frame rate	70fps(16bit), 80fps(8bit)
Readout noise	Typ.: 2.1e-(Median)
Exposure time	10 μ s-10s
Binning	2x2, 4x4
ROI	Support
Trigger Mode	Hardware & Software
Output Trigger Signals	Exposure Start, Readout End
Trigger Interface	HIROSE
Data Interface	USB3.0
Data Bit Depth	16bit & 8bit
Optical Interface	M42
Power Supply	USB3.0
Power Consumption	< 4W
Dimensions	56mm x 56mm x 61.7mm
Weight	305g
Software	Mosaic, LabVIEW, MATLAB, Micro-Manager2.0, SamplePro
SDK	C, C++, C#, Python
Operating System	Windows/Linux
Operating Environment	Temperature 0~40°C / Humidity 10~85%

Tucsen Photonics Co., Ltd.

Add: 5# Wanwushe Smart Industrial Park, No.2 Yangqi Branch Rd,
Gaishan Town, Cangshan Area, Fuzhou, Fujian, PRC, China.

MSHシステムズ株式会社 MSH Systems, Inc.

本社 〒104-0032 東京都中央区八丁堀3-25-10 JR八丁堀ビル6階
TEL : 03-6659-7540 FAX : 03-6659-7541
神戸オフィス 〒650-0011 神戸市中央区下山手通5-12-4-301
TEL : 078-335-5531 FAX : 078-335-5532
<https://www.msh-systems.com>
E-mail : sales@msh-systems.com