



TrueChrome Metrics

HDMI Microscope Camera

Built-in HDMI quick measurement function

Perfect color reproduction


Compatible with Mosaic software



ISO9001 CE  RoHS

www.tucsen.com

Built-in Image Measurement System

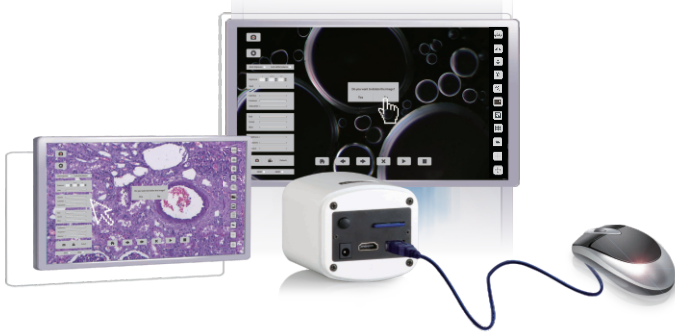


- Built-in Mouse Control Function

The significant innovation of TrueChrome is embedding the software inside the camera. Users can perform image capture processing-measurement-save-export functions through the mouse directly.

- Professional Digital Image Measurement System

TrueChrome Metrics provides extremely powerful measurement functionalities including, freehand line, rectangle, polygon, circle, bicircle, angle, point-line distance and much more, realizing precise measurement of point and line distance, angle, length, circumference and area. Three different length units of millimeter, centimeter, and micrometer are provided to meet various measurement requirements in different applications.

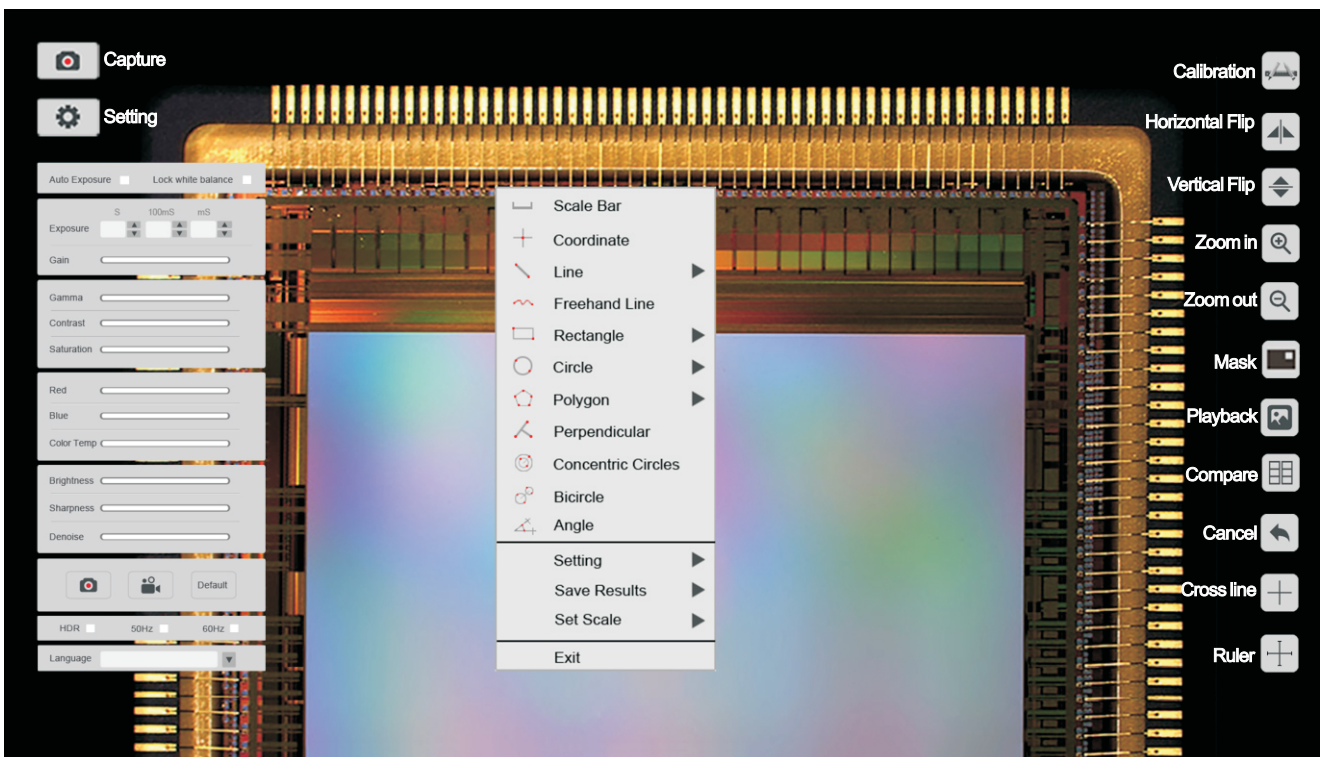

Mosaic - PC software


Unique from the cumbersome process of traditional technology to obtain images after processing, the computing imaging software Mosaic provides real-time image stitching and real-time depth of field fusion. This can automatically complete the image while the operator moves the stage - productivity at its best.

○ Real-time image stitching

Within a few seconds of moving the stage, the Mosaic can complete the whole process of panoramic stitching in real time, and it can be accurately and quickly stitched under different magnifications and arbitrary angles.

Sample: Mouse ovary section
Magnification: 10X ▶



Before

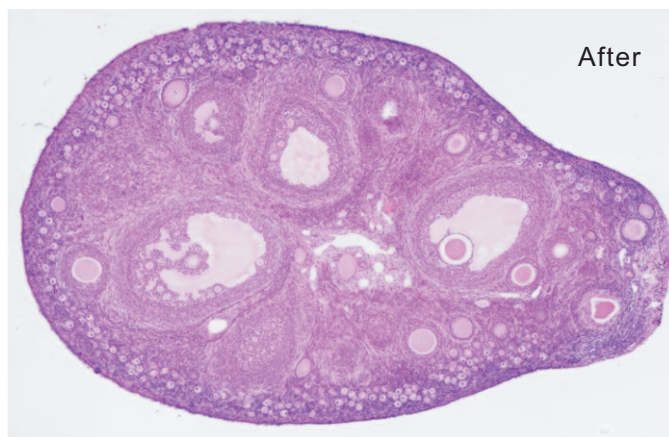


○ Real-time depth-of-field fusion

Rotating the focus ring to image different depth of field points, the Mosaic can then realize the depth of field expansion, full-length details at a glance, no more blurred images!

Sample: Circuit board pin
Magnification: 4.5X ▶

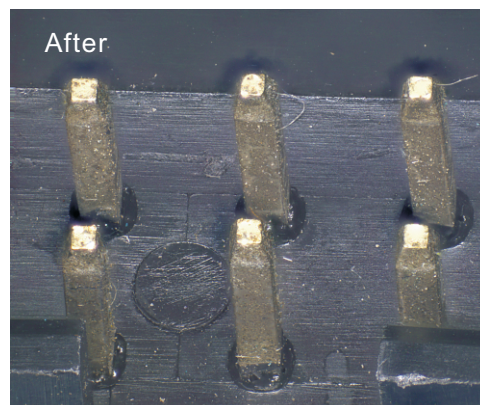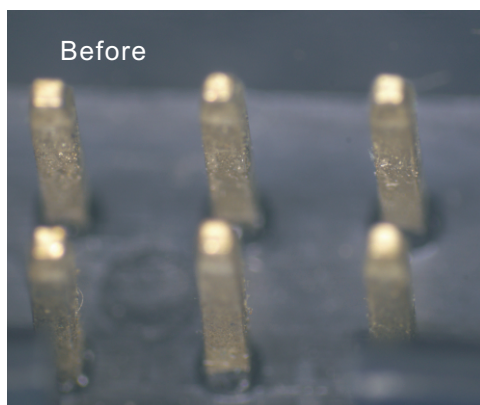

The continuation of the TrueChrome

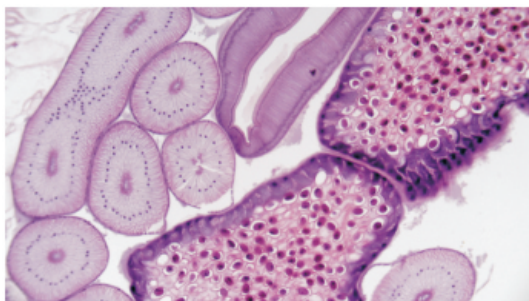

- Perfect color reproduction

TUCSEN's color processing is capable of a new level of precision, matches the monitor image to the eyepiece view, produces extremely-high color definition.

-
- Fastest USB2.0 camera with 30 fps

With 30fps data transfer at an uncompressed resolution of 1920X1080, TrueChrome Metrics sets a precedent. Make it one of the fastest USB2.0 camera in the world.



- Tailored 1080P HD screen

In order to let users better feel the excellent quality of the Tucsen cameras, we specially customized a 1080P high definition display screen - Retina Screen, which perfectly matches the performance of TrueChrome camera, the up to 30fps transmission rate gives high fidelity, smooth performance

Note: Retina Screen is an optional accessory that users can choose to use.


Copyright >>

Tucsen is an authorized dopter of the international organization HDMI associate. We are the legal supplier of HDMI cameras which represents the best stability and compatibility of Tucsen HDMI cameras.




Sample >> Applications

Pathological analysis



Pathological analysis requires that the image color fidelity be 100% accurate, especially for digital imaging, it has great claims for the purple blue color rendition. With perfect performance for purple blue colors, TrueChrome Metrics ensures precise and accurate pathological images.

Material qualification




Industry applications highly require excellent clear and sharp images without any delay, up to 60fps high definition live preview from TrueChrome Metrics allows you to comfortably and efficiently perform quality inspection.

Teaching




In teaching presentations, the lecturer can use a computer to set up a specimen and project the specimen images to a big screen for students to view. TrueChrome Metrics allows a dual live video stream to a PC and any imaging device with HDMI interface.

Fluorescence imaging



When it comes to low light applications, it crucial to have a high sensitivity camera, with up to 10 seconds exposure capability. This means the TrueChrome Metrics is 300 times more sensitive than the other HDMI cameras in the market.

Medical anatomy recording



Need to record the microsurgery procedures clearly and fluently? TrueChrome Metric's high definition with fast speed recording capability offers superb documentation at 1080P 30fps.

Camera specification

Sensor	CMOS	Sensor Size	1/2.8"
Dynamic Resolution	2MP, 1920x1080	Static Resolution	6MP, 3264x1836
Frame Rate	30fps @USB2.0 25fps @HDMI	Video Recording	30fps @PC 30fps @SD Card
Exposure Mode	Auto/Manual	Exposure Time	0.001s-10s
Output Interface	USB2.0,SD Card, HDMI	Setting	Gamma, Gain, WDR Noise Reduction,
White Balance	Auto/Manual	Optical Port	Standard C-Mount
Built-in Software	Cloud	PC Software	Mosaic V2 / Mosaic V3
Size	90.7x78x70.8(mm)	Weight	265(g)
Compatible OS	Windows 7 , 10 (32 Bit / 64 Bit) , Mac		

Retina Screen Features

Resolution	1080P(1920x1080)	Display Type	IPS-Pro
Screen Size	11.6"	Aspect Ratio	16:09
Brightness	320cd/m2	Static Contrast Ratio	1000:01:00
HDMI Port	1	Power Supply Type	12V, 2A
Size	282.0x180.5x15.3(mm)	Weight	600(g)

PC software features

Modular function configuration
Intelligent 12-bit ISP color reproduction
Real-time depth of field fusion (Option)
Real-time image stitching (Option)
Real-time fluorescence image synthesis and editing
HDR image synthesis
Micro-imaging-based intelligent automatic exposure
Intelligent flat field correction based on dynamic calculation
Smart measurement workflow
Implements multiple iterations of workflow execution
Supports single shot, delayed camera
Automatic video and delay video generation
Output format selection
User parameter group save and load
Dynamic \ static measurement
Layered measurement
Customize measuring gauges, layers, precision
Customize image naming, style, save location
Implements drawing: points, lines, rectangles, polygons, circles, arcs, angles
Data export as TXT or Excel
Report generation and printing

Tucsen Photonics Co., Ltd.

Web: www.tucsen.com

E-mail: support@tucsen.com

